## Slides 2601, Width 12.7 mm, to 34 kg, Compact Profile, Full extension

**Material:**
Slide elements: Cold-rolled steel, zinc plated.
Ball retainers: Cold-rolled, zinc-plated steel.
Balls: Hardened steel.

Telescopic ball bearing slides for applications in the industrial and electronics sector.

- Very compact profile.
- Universal hole pattern.
- Noise dampening of all end stops.
- Hold-in in closed position.
- Can be mounted on both sides.
- Service life 10,000 cycles.

**Ordering details: e.g.: Prod. No. 649 006 20, Slides 2601**

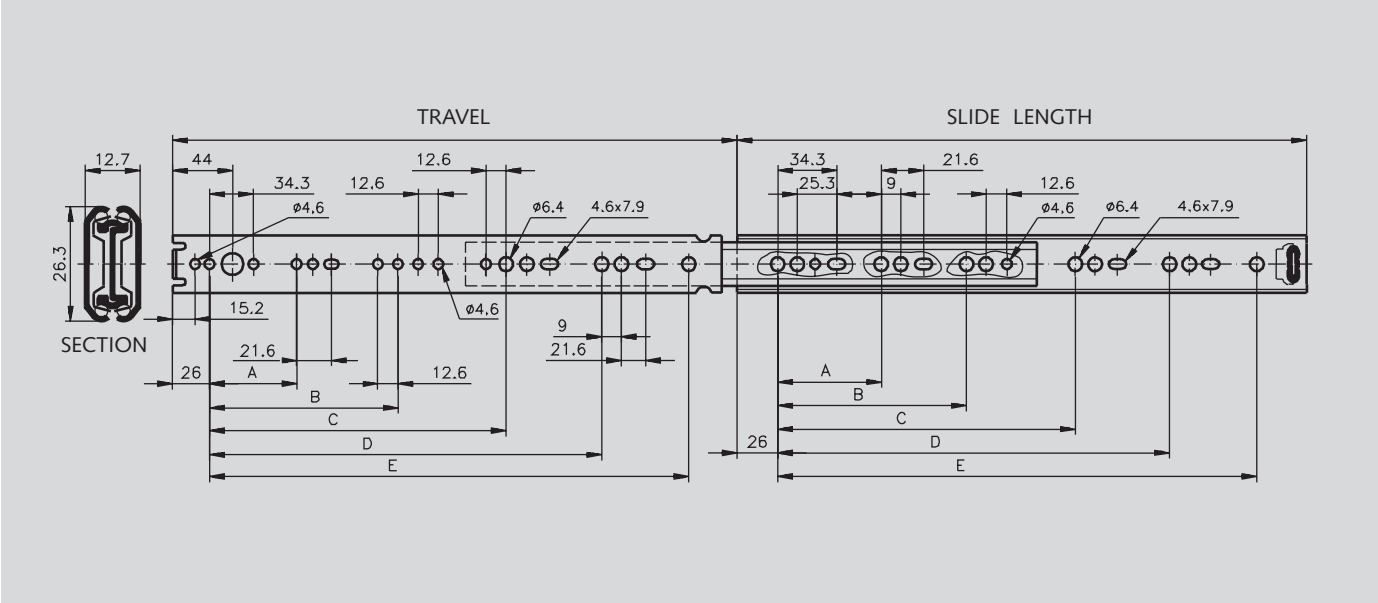


| Product No. per Pair | Slide Length mm | Travel +/-3.2 mm | A mm | B mm | C mm | D mm | E mm | Load Rating per Pair kg | Weight per Pair kg |
|---|---|---|---|---|---|---|---|---|---|
| **649 006 20** | 200 | 209 | 128 | - | - | - | - | 16 | 0.46 |
| **649 006 25** | 250 | 259 | 128 | - | - | - | - | 23 | 0.59 |
| **649 006 30** | 300 | 308 | 128 | 224 | - | - | - | 32 | 0.69 |
| **649 006 35** | 350 | 357 | 128 | 224 | - | - | - | 34 | 0.80 |
| **649 006 40** | 400 | 406 | 128 | 224 | 320 | - | - | 32 | 0.93 |
| **649 006 45** | 450 | 456 | 128 | 224 | 352 | - | - | 29 | 1.06 |
| **649 006 50** | 500 | 505 | 128 | 224 | 352 | 416 | - | 29 | 1.18 |
| **649 006 55** | 550 | 554 | 128 | 224 | 352 | 448 | 489 | 27 | 1.29 |

### Note

Recommended mount: M4/M6 screw.
Use all mounting positions to achieve the max. load rating.